



## 50 Watt Dummy Loads, 3 GHz, N Male:-

### Electrical Specification


Operating Frequency:	DC~3000MHZ
Tolerance:	-----
Attenuation:	-----
V.S.W.R	1:1.3/MAX
Isolation Rate	-----
Amplitude Unbalance	----
Phase Unbalance	----
Input Power	20-30Watt
Impedence	50Ω/Nominal

### Physical Specification

Operating Temperature:	-40℃ ~ +80℃
Dimension (W*D*H/mm)	-----
Weight (gram)	50g
Connector-input	N male
Connector-output	-----



[ Product image ]

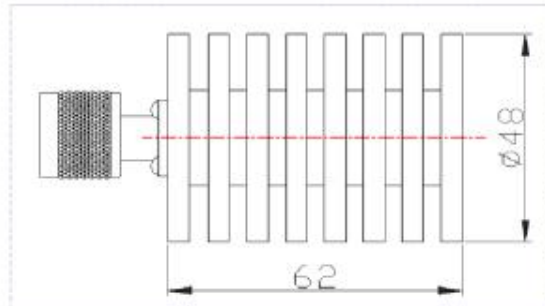

[ Drawing image ]

### Plating

Inner conductor	Silver Plated
Outer Conductor	Nickel Plated
Other Metal Parts	Black Plated

### Material Specification

Inner Conductor	Beryllium Copper or Spring Bronze
Other Metal Parts (Housing)	Aluminum



**SYNERGY TELECOM (P) LTD.**

13-15, RPS Flat, E-Block, Vileca Park, New Delhi - 110 018 (INDIA)  
 Phone: +91-11-28533349 Fax: +91-11-28531435 Mobile: +91-9810138894  
 Email: pradeep@rfconnectorhouse.com, MSN: pradeepgrowal@synergy@hotmail.com  
 PRINCIPAL SITE: <http://www.vlncom.info> Skype Account: pradeepg  
 My trademanager ID: synergytelecom [www.rfconnectors.info](http://www.rfconnectors.info)

pdfMachine

**A pdf writer that produces quality PDF files with ease!**

Produce quality PDF files in seconds and preserve the integrity of your original documents. Compatible across nearly all Windows platforms, simply open the document you want to convert, click "print", select the "Broadgun pdfMachine printer" and that's it! Get yours now!