

Synergy Telecom P Ltd.

RJ 45 DATA SURGE ARRESTER

Specifications


Electrical Specifications

| | |
|------------------------------|--|
| Ethernet Connectors | (2) Shielded RJ45 Jack |
| Data Lines | Pair 1: Pins 1 and 2 Pair 2: Pins 3 and 6 |
| Data Clamping Voltage | 15 Volts |
| PoE Clamping Voltage | 58 Volts |
| PoE Mode Support | Mode B for power |
| CAT-5 Power Pinouts | +/- VDC: Pin 4 +/- VDC: Pin 5 +/- VDC: Pin 7 +/- VDC: Pin 8 |

Mechanical Specifications

| | |
|------------------------------|---|
| Enclosure Material | Cast Aluminum |
| Ground Lug | 10 AWG Max. |
| Operating Temperature | -40 C (-40 F) to +80 C (+176 F) |
| Weight | .28 lbs. (.13 kg) |
| Dimensions | 3.6 x 1.4 x 1.2 (inches) 91.4 x 35.5 x 38.1 (mm) |
| RoHS Compliant | Yes |

HGLN-CAT5-2

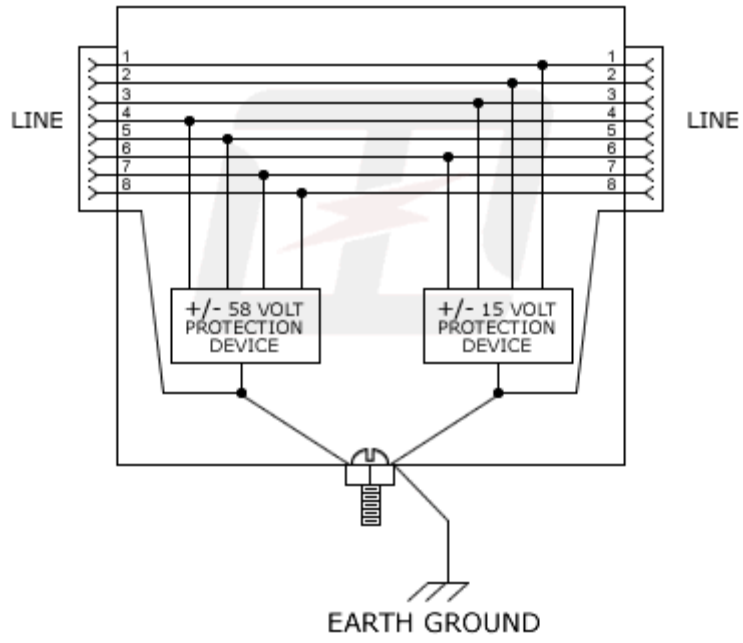

**RJ45 TO RJ
45 SURGE
ARRESTOR**



Synergy Telecom P Ltd.
13-15 RPS flats, E-block, Vikaspuri N Delhi, 110018...India
Phone-91 11 28533349, Mobile 91-98101 38894 , Fax -91 11 2853
1435,
pradeep@rfconnectorhouse.com ; MSN -
pradeepagrawalsynergy@hotmail.com
Skype Accout - pradeepag , My trademanager ID -synergytelecom
;
<http://www.rfconnector.info/>

13-15 RPS flats, E-block, Vikaspuri, N Delhi-110018, India
Phone-91 11 28533349, Mobile-91 98101 38894, Fax -91 11 2853 1435,
E-mail : pradeep@rfconnectorhouse.com, Website : <http://www.rfconnector.info/>