

MC3 T branch solar connector

SY-B3B



Technical Data

Materials:


Housing	PA66
Housing color	Black
Contacts	Copper,tin plated

Electrical data:

Rated current	25A
Rated voltage	1000V(TÜV)600V(UL)
Test voltage	6KV(TÜV50HZ,1min)
Contact resistance	0.4mΩ

Environmental:

Degree of protection	IP65
Standards	TÜV
Temperature range	-40°C ~ +90°C
Flame class	UL94-V0
Safety class	II
Pin dimensions	Φ3mm

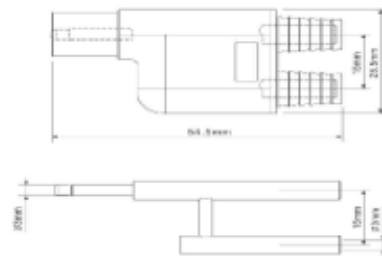

Description



Configuration

- 1.Suitable for SY-R3A