

SYNERGY TELECOM PVT LTD

Indoor Flat Omni Antenna(Slim size)



Product Description

These Omni directional Antennas are specially designed for In – building distribution of CDMA, GSM, DCS, PCS & WLAN Signals.


Technical Specifications

| | | |
|--|-----------------------|------------------------|
| Antenna type | Omni | |
| Electrical Specifications | | |
| Frequency Range (MHz) | 700 – 960 / 1710-3500 | |
| Peak Gain (dBi) | 700-960 2 Nominal | 1710-3500 3 Nominal |
| VSWR | 1.7:1 Typical 2:1 Max | |
| Radiation Pattern | Near Omni | |
| Intermodulation IM3;2x43 dBm Carrier (dBc) | -140 | |
| Impedance (ohms) | | |
| Connector | N Female | |
| Dimension (mm) | 126 x 54 x 8.2 | |
| Weight (grams) | 90 | |
| Radome Material | ABS White | |
| Temperature Range | -20°C to +70°C | |

Antenna Patterns

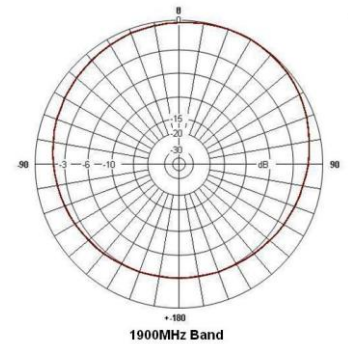

Product Photo

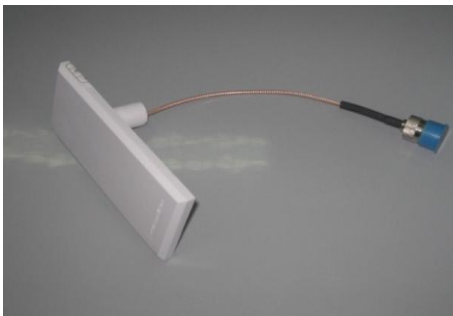

WZ-47, Basement, Saini Chowk, Budella Village, Vikas Puri, New Delhi-110018, Phone:91-11-28533349, Mobile:91 9810138894, Fax:91-11 2853 1435, Email:Pradeep@rfconnectorhouse.com, Website:http://www.rfconnector.info/